


Product Type: Plug-in terminal-Plug

Product Name:MC-RQ7.62HXXP-K-0001

Product Description: Pitch:7.62mm Rated Voltage : 1000V Rated Current:41A Connection method : Push in connection colour : customizable

## Product Size

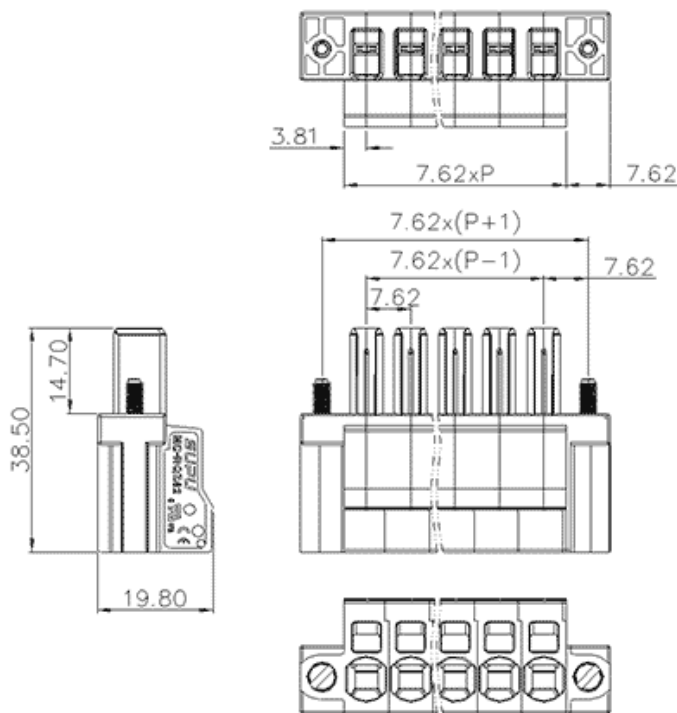

## Parameters

⌘ SUPU ID	MC-RQ7.62HXXP-K-0001
⌘ Pitch	7.62
⌘ Number of connections	XX
⌘ Connection method	Push in spring connection

☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PPA
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

☞ IEC Rated Current	41A
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III/III/ II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	8.0KV8.0KV8.0KV
☞ UL Rated Current	35A 35A -
☞ UL Rated Voltage	600V 600V -
☞ Conductor cross section rigid	0.2-10mm <sup>2</sup>
☞ Conductor cross section flexible	0.2-6mm <sup>2</sup>
☞ Conductor cross section flexible,with furrule	0.2-6mm <sup>2</sup>
☞ Locking screw Specification	-
☞ Locking screw torque	-
☞ Fixed Screw Specification	M3
☞ Stripping length	13-15mm
☞ Use group	B/C/D

☞ Order No

MC-RQ7.62HXXP-K-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-05-03 22:24

The right to modify data belongs to SUPU.